

Drain-Net A6 Wet Waste Interceptor

A6 Specifications

Product Features


- •100% stainless steel. This is our most durable unit yet.
- •Available with 2 side outlets or 1 down outlet. All outlets are 2" female pipe thread. We also offer Fernco couplings & caps for connecting to PVC pipes.
- •Can be as short as 11" tall (with the short legs and no splash guard) to fit under most dishwashing or food prep sinks. Also available with 10.25" adjustable legs. Add 8" leg extensions when needed. You can stack multiple extensions per leg.
- •The legs feature flanged feet to attach to floor if needed.
- •Removable strainer drawer is easy to use, requires no electricity and has no moving parts. Much safer and more reliable than a garbage disposal.
- •Features 2" Splash Guard that also fits under rounded sink bowls. No piping needed from the sink to the A6 unit. Can be used to replaced garbage disposals.
- •Best method for collecting food solids from a commercial kitchen sink before being discharged into the drain line and going to a grease interceptor.




A6 (above) shown with side outlets and adjustable legs.

Model A6 Diagram (all dimensions in inches)

Diagram shown with side outlets. Available with down outlet.



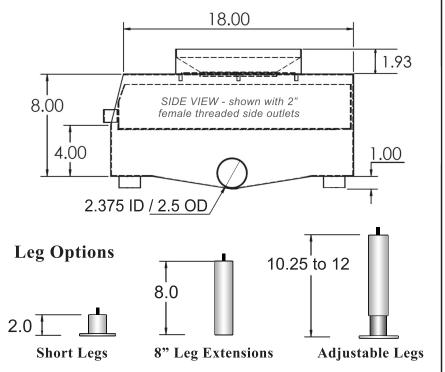

Installation

- 1. Screw legs (and extensions) into the bottom of the housing. Multiple extensions can be used if needed. Hand tighten.
- 2. Place the unit under the sink. Carefully align the splash guard (on the top) with the drain opening of the sink.
- 3. Connect outlet(s) to the existing pipes under the sink and cap off any unused outlet (if needed). We offer Fernco caps and couplings for connecting to PVC pipes.
- 4. Bolt the flanged feet to the floor for extra stability if needed.

A6 Configurations

